




ALIO STAGE AND MOTOR SPECIFICATIONS

MODEL	UNITS	AI-VC-600-24N-Z-CB	AI-VC-2400-11N-Z-CB	AI-LM-5000-15N-Z-CB
TRAVEL [7]	mm	6	24	50
MAX VELOCITY	m/s	0.1	0.1	0.3
MAX ACCELERATION	G	0.5	0.5	0.5
ASSEMBLY MASS	kg	3.8	3.8	4.4
MOVING MASS	kg	1.5	1.5	2.1
MAX PAYLOAD [8]	kg	10	10	10
COUNTERBALANCE PRESSURE [9]	psi	45	45	47
MOTOR INFORMATION				
MOTOR TYPE	--	VOICE COIL	VOICE COIL	LINEAR BRUSHLESS
MOTOR MODEL	--	VC15-16	VC15-26	P16-0.5
MAGNETIC PITCH (N-N)	mm	--	--	30.48
MAX VOLTAGE (LINE TO LINE) [1]	V	33	46	500
ELECTRICAL TIME CONSTANT	msec	0.3	0.5	0.14
MAX MOTOR TEMP	°C	155	155	130
DELTA CONNECTION [5]				
FORCE CONSTANT	N/Apk	12.7	8.8	7.2
PHASE RESISTANCE (@25° C) [2]	Ohm	4.7	9.1	2.9
PHASE RESISTANCE (@130° C) [2]	Ohm	--	--	4.2
INDUCTANCE	mH	1.3	4.2	0.6
CONTINUOUS FORCE [3,10]	N	24	11	15
CONTINUOUS CURRENT [3]	Apk	1.9	1.3	2.1
PEAK FORCE [4,10]	N	89	44	74
PEAK CURRENT [4]	Apk	7.0	5.0	10.3
BACKEMF CONSTANT	V/m/s	12.7	8.8	7.2
WYE CONNECTION [5]				
FORCE CONSTANT	N/Apk	--	--	12.4
PHASE RESISTANCE (@25° C) [2]	Ohm	--	--	8.8
PHASE RESISTANCE (@130° C) [2]	Ohm	--	--	12.4
INDUCTANCE	mH	--	--	1.8
CONTINUOUS FORCE [3]	N	--	--	23
CONTINUOUS CURRENT [3]	Apk	--	--	1.9
PEAK FORCE [4]	N	--	--	74
PEAK CURRENT [4]	Apk	--	--	10.3
BACKEMF CONSTANT	V/m/s	--	--	12.4

Notes:

1. Back EMF plus IR drop must not exceed maximum line to line voltage.
2. Resistance values do not include cable resistance. Cable resistance adds 0.66 ohm/m for Delta connection and 0.99 ohm/m for Wye Connection.
3. Continuous operating limits are based on continuous operation at maximum temperature with aluminum heat sink (300mm x 12.5mm x motor length).
4. Maximum on time at peak operating limits is 10 seconds.
5. Delta connection applies only to linear brushless motor.
6. All specifications may vary by 12% from listed values.
7. Travel listed is travel between hard stops.
8. Higher payload options available upon special request.
9. Pneumatic counterbalance supply pressure listed is the estimated pressure required at the max payload.
10. Voice coil peak and continuous forces are reduced by 25% at the ends of travel.

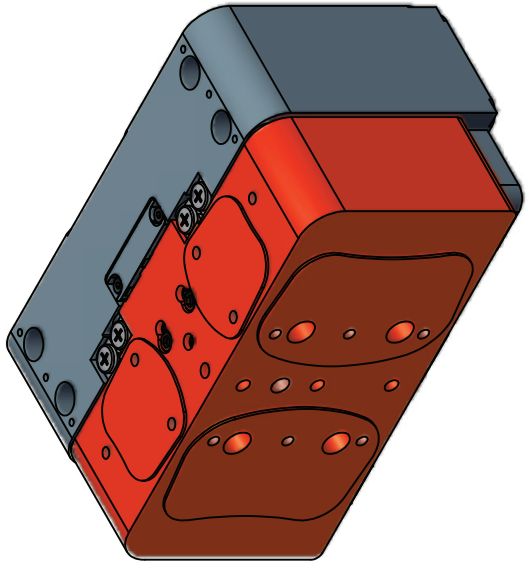

DRAWN	5/12/2012
NBROWN	
CHECKED	
Tolerances: Surface Roughness: x.x ± .05 in [1.3 mm] x.xx ± .01 in [0.25 mm] x.xxx ± .005 in [0.13 mm] Angles ± 0.5° RMS MAX. ✓	
TITLE	
AI-(MOTOR)-(TRAVEL)00-(FORCE)-Z-CB	
SIZE	DWG NO
B	0010-08004
FINISH	SCALE
SEE NOTES	ALIO STD TEMPLATE - REV 006
1	1
OF	1
REV	002

ALIO INDUSTRIES PROPRIETARY INFORMATION
(Tel) 303.339.7500 - SALES@ALIOINDUSTRIES.COM - WWW.ALIOINDUSTRIES.COM



REV	002
OF	1
SHEET	1
SHEET	1